

SPECIFICATIONS


G-Star Printer @ Smartlink-SMT

G-Star Printer	
Performance	
Machine Alignment Capability	2Cmk @ ± 12.5 microns 6 sigma
Process Alignment Capability	2Cpk @ ± 25 microns 6 sigma
Core Cycle Time	< 8.5 secs
Product Changeover Time	< 3 mins
New Product Set-up Time	< 10 mins
Board Handling	
Max. Size (L x W)	400 mm x 340 mm
Min. Size (L x W)	50 mm x 50 mm
Thickness	0.4~6 mm
PCB Thickness Adjustment	Manual (Auto is option. PCB max. width reduced to 310 mm)
PCB Max. Weight	3 kg
PCB Edge Clearance	3 mm
PCB Bottom Clearance	15 mm (7 mm with optional auto PCB thickness adjustment)
PCB Warpage	Max. 1% diagonally
Clamping Method	Top clamp (manual) and motorized side clamp
Support Method	Magnetic support pins, bars, blocks, Vacuum suction
Conveyor Direction	L to R, R to L, R to R, L to L (software control)
Conveyor Height	900 $\pm$ 40 mm
Conveyor Speed	1,500 mm/s
Conveyor Width Adjustment	Automatic
Printing Parameters	
Stencil Frame Size (L x W)	Adjustable, 470 mm x 370 mm to 737 mm x 737 mm
Print Gap (snap-off)	0~20 mm
Printing Table Adjustment Range	X: ± 3 mm, Y: ± 7 mm : $\pm 2^\circ$
Print Speed	6~200 mm/s
Squeegee Pressure	0.5~10kg (program control)
Squeegee Type	Std.: Metal , Option: OPC, rubber
Squeegee Angle	Std. 60°, Option 45°, 50°, 55°
Cleaning System	Auto wet, dry, vacuum (software select)
Optical System	
Field-of-View (FOV)	8 mm x 6 mm
Fiducial Types	Circle, triangle, square, diamond, cross
Fiducial size	0.5~3.0 mm
Vision Methodology	CCD camera look up & down
2D inspection	Max. 100 windows to inspect missing & insufficient (std.)

SPECIFICATIONS

G-Star Printer @ Smartlink-SMT

G-Star Printer	
Facilities Requirements	
Power Supply	AC220V $\pm$ 10% 50/60Hz
Power Consumption	2.5kW
Air Supply	4 ~ 6Kg/cm ²
Dimension	1,158 mm (L) x 1,362 mm (W) x 1,463 mm (H)
Machine Weight	1,000 kg
Operator Interface	
Hardware	LCD Monitor, Mouse & Keyboard
Operating System (OS)	Windows 10
Control Method	Industrial PC controlled
I/O Interface	SMEMA Standard
Options	
Paste Rolling Diameter Monitoring System	
Stencil Apertures Inspection System	
Auto Table Adjustment for PCB Thickness	
SPI Closed-loop	
External Barcode Scanner for PCB Traceability	
Handheld Barcode Scanner	

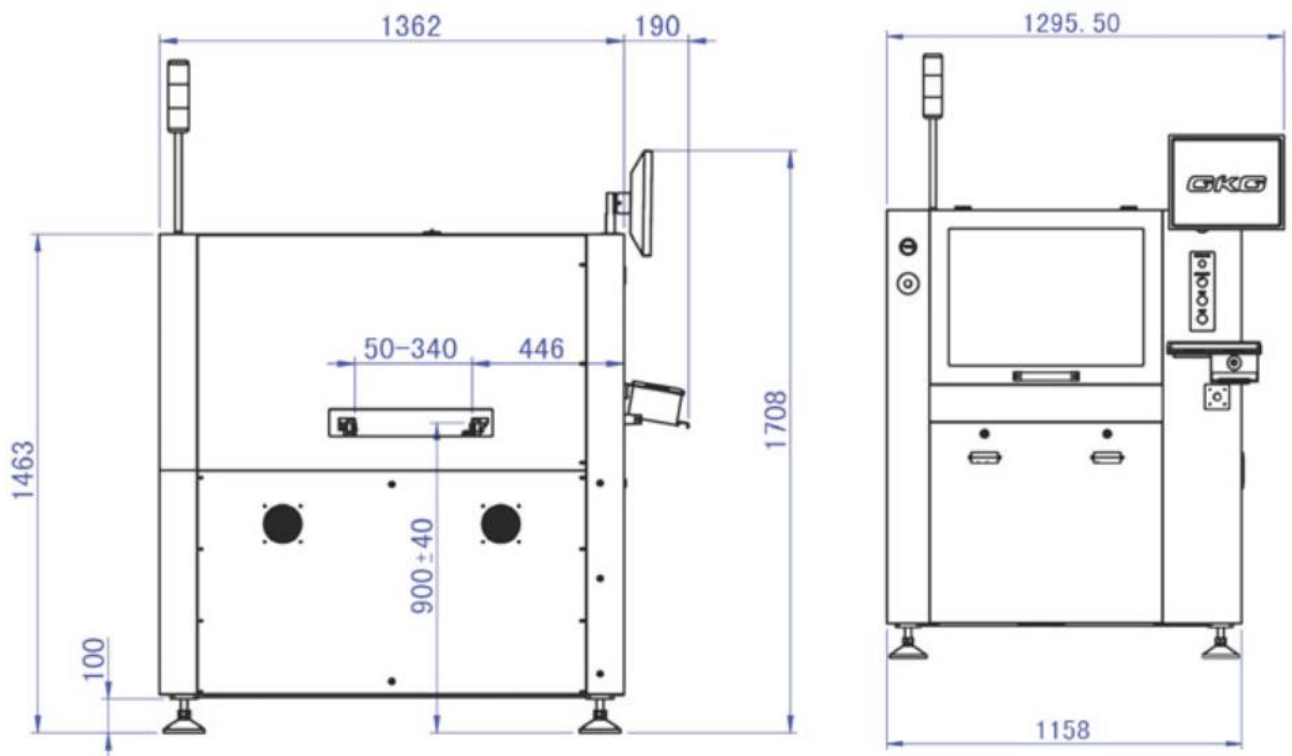

All technical data has been carefully checked; however, we assume no liability for its accuracy or completeness.
Subject to change without notice.